

HDMI CAT-5 Extender



HD1011 Features

The HDMI CAT-5 Extender HD1011 allows you to place your HDTV display up to 200 feet away from your HDTV source. All you need are two CAT-5 cables. The HD1011 provides a cost effective way of getting the most from your HDTV equipment.

- HDMI 1.3 compliant
- Extends the distance between an HDTV source and display up to 200 feet at 1080i or 720p resolution.
- Extends the distance between an HDTV source and display up to 150 feet at 1080p resolution.
- Includes two 6 foot HDMI cables
- HDCP compliant
- Minimize the cable skew by an adjustable equalization switch with 8 levels

Package Contents:

- Video Bandwidth: 2.25 Gbps (HDMI 1.3)
- Input TMDS signal: 1.2 volts (peak-to-peak)
- Input DDC signal: 5 volts (peak-to-peak)
- HDMI Connector: 19 pin type female connector
- Power Supply: 5V 1A (UL & CE Approved)
- RJ-45 Connector: 2 indication LEDs
- Dimensions: 2.75" x 2.60" x 1.0" (L x W x H)
- Shipping Weight: 2.5 lbs.

For more information, please contact:

info@videobaluns.com
Tel: (508) 620-1002

Specifications

Top View – Transmitter



Top View – Receiver



Front View – Transmitter

HDMI IN: Connect to your HDMI source with the included HDMI cable here.



Front View - Receiver

HDMI OUT: Connect to your HDTV display using the included HDMI connector.



Rotary switch: Adjust the equalization strength to optimize the image.

Rear View – Transmitter

TMDS: Plug in a CAT5/5e/6 cable to the jack labeled TMDS on the receiver.

DDC: Plug in a CAT5/5e/6 cable to the jack labeled DDC on the receiver.



Rear View - Receiver


TMDS: Plug in a CAT5/5e/6 cable to the jack labeled TMDS on the receiver.

DDC: Plug in a CAT5/5e/6 cable to the jack labeled DDC on the receiver.



5V DV: Connect to the 5V DC power supply.

Installation Manual

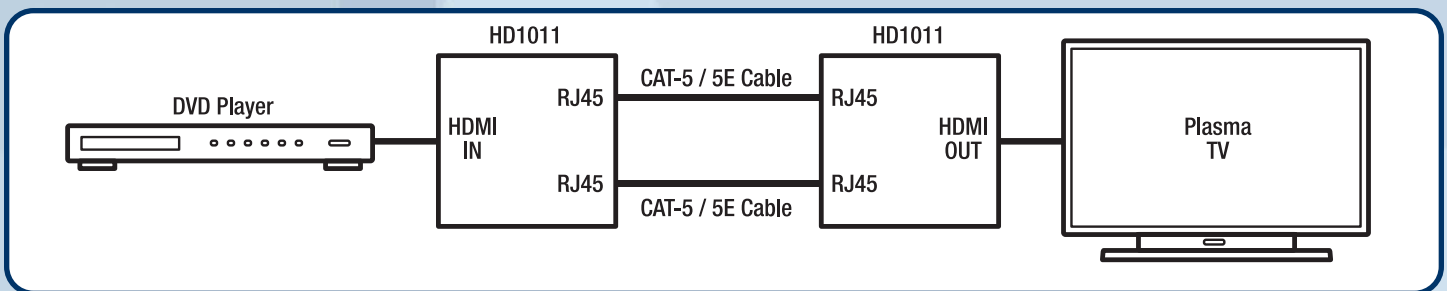

Manufactured exclusively by Videobaluns Unlimited, LLC
 Tel: (508) 620-1002
 Fax: (508) 620-1004
 Email: sales@videobaluns.com